

Fig. 1

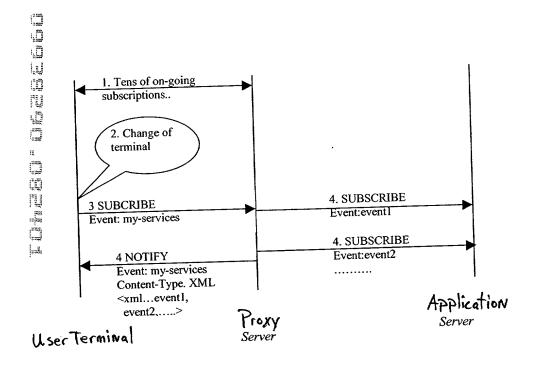
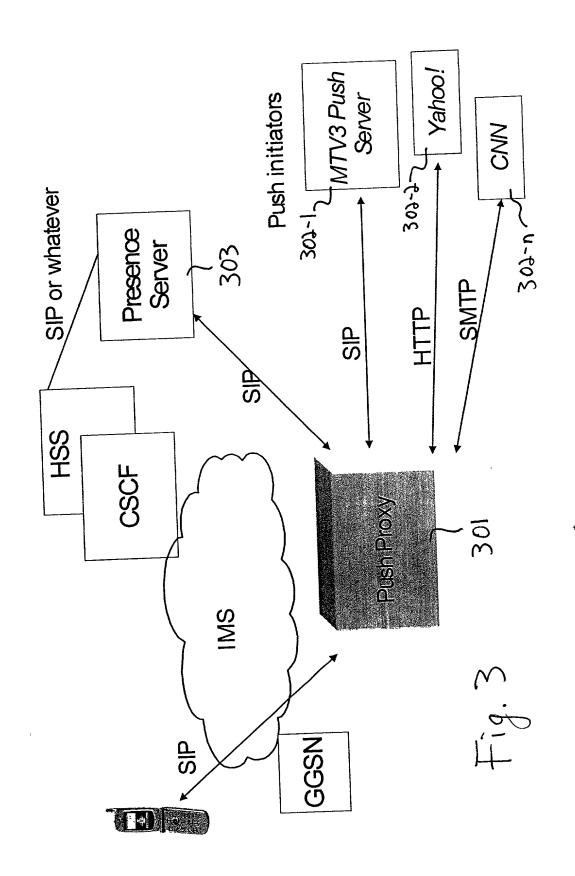


Fig. 2



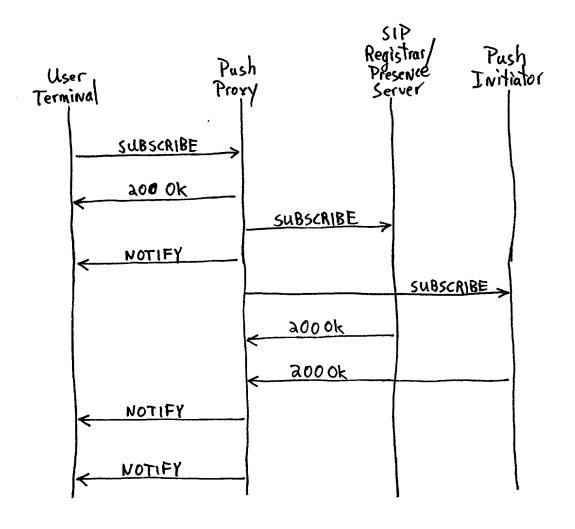



Fig. 4


SIP SUBSCRIBE


Event: Push
From: sip:pk@mci.com
Content: XML
<XML allow_ads=no>

202 Accepted / 200 ok

下海,5

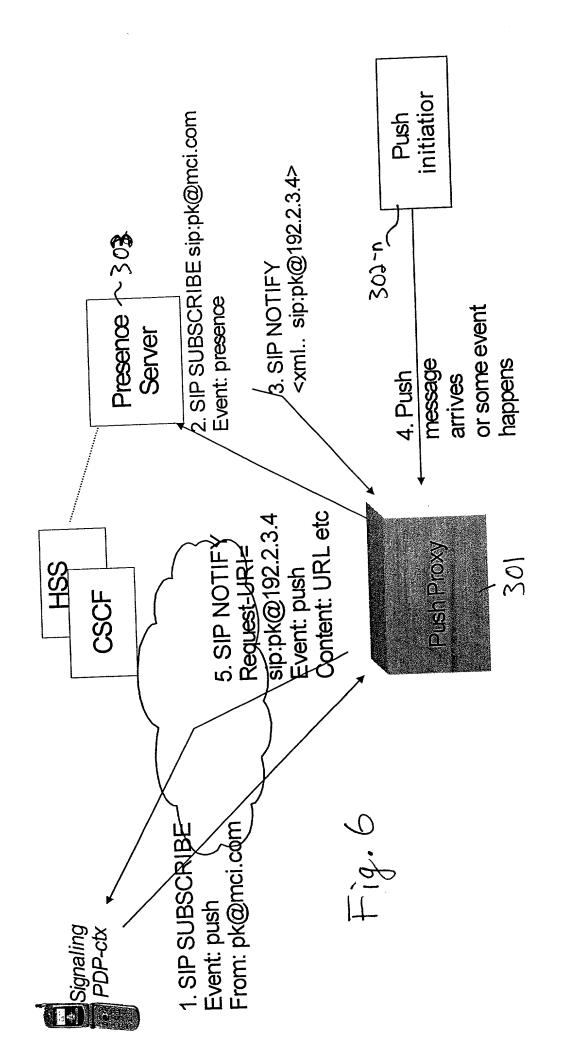

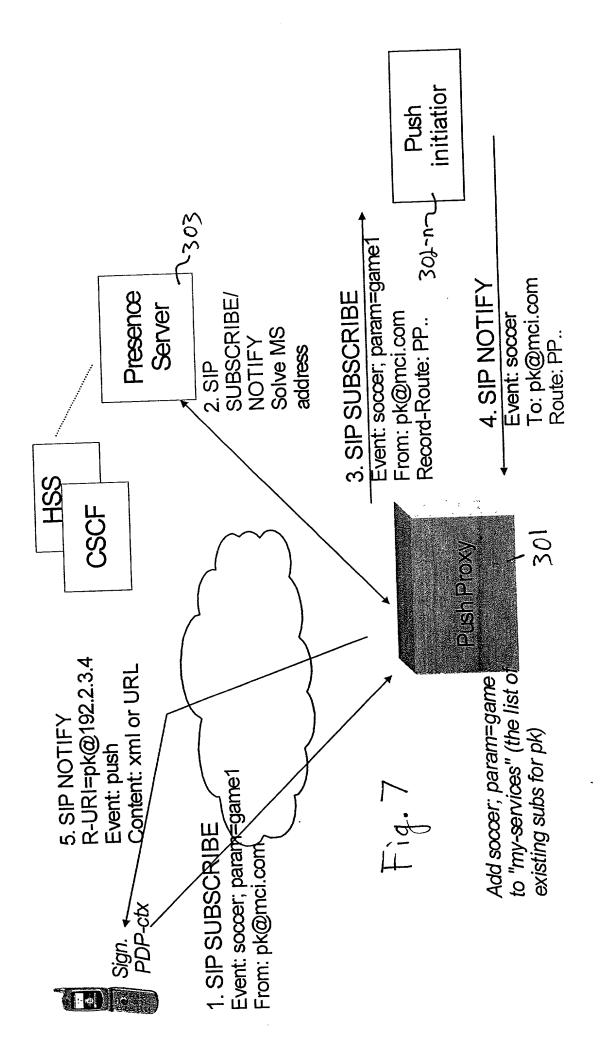

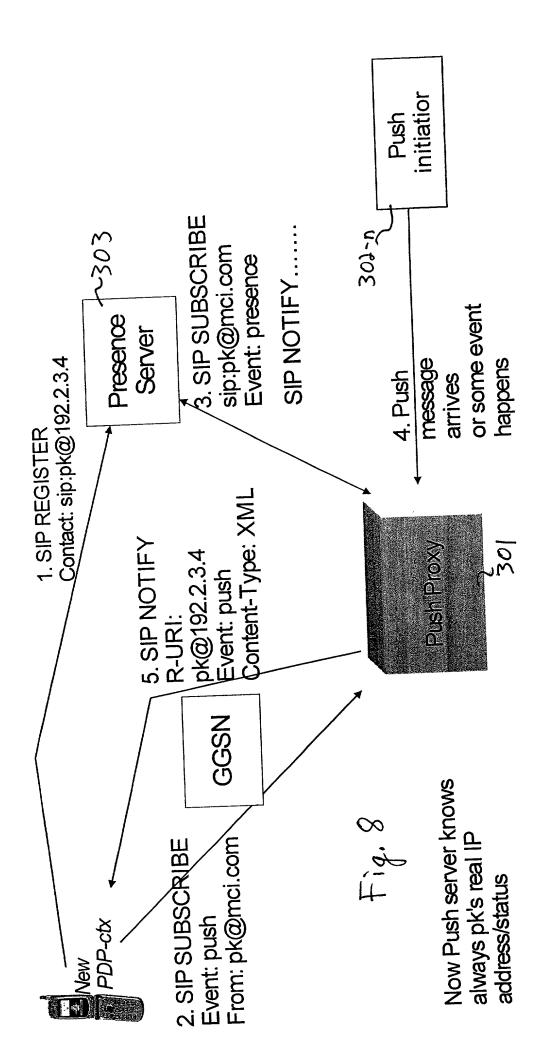

301 World Mand

Fig. 9

Subscription/push database:

User: sip:john@mci.com = sip:john@192.99.99.77

R-URI=sio:socoer.com soccerupdate: param=dame292_ Events:

User: sip:petri@mci.com = sip:pk@192.22.33.44; transport=UDP

soccerupdate; param=chelseagame19 soccerupdate; param=manugame25 Events:

com.nokia.clubnokia; param=foo2 push1

R-URI=sip:club.nokia.com R-URI=sip:robot@chess.fi R-URI=sip:manu.co.uk R-URI=sip:soccer.com R-URI=localhost:50 Push initiator:

THI) Ic

SIP or HTTP

subscriptions after

to manage

they have been

created by MT